



For Earth, For Life
Kubota

SSV

KUBOTA SKID STEER LOADER SSV65/SSV75

The outstanding power and exceptional comfort of Kubota's new Skid Steer Loaders take high-performance and productivity to a new level.

New standards in skid steer loader performance and operator comfort.

It's all-new, inside and out, and ready for any job you give it. From Kubota, the well-known compact excavator brand, comes a new skid steer loader designed to get the job done faster and keep you working comfortably.

Outstanding performance

High productivity requires versatility—like travelling at low- or high-speed ranges, or handling multiple functions such as grappling, or drilling and augering. Of course, that work needs this kind of abundant power.

	SSV65	SSV75
Engine (Gross)	64 HP 47.7 kW	74.3 HP 55.4 kW
Rated operation capacity-50% tipping load	885 kg	1220 kg
Breakout force Bucket	2195 kgf	2669 kgf
Lift arm	1750 kgf	2200 kgf

Exceptional comfort

More operator comfort means more productivity. It all begins in a roomy, fatigue- and stress-reducing cabin that encourages all-day alertness. A wider entrance affords effortless entry and exit—while the sliding front door can be opened or closed regardless of the loader position. Of course, Kubota comfort also comes in the form of a dust-resistant pressurized cabin, with an optimized air conditioning and climate control system.

Features

Sliding front door

Standard on the Skid Steer Loader Series is Kubota's ingenious sliding front door. Operators appreciate that the door can be opened regardless of the loader position, allowing entry or exit even in difficult situations.

Side Light

As a standard feature on Kubota's new skid steer loader, the new side light feature expands the operator's visibility on the job site at night for a more productive and safe work environment.

Optional multi-function lever

Allows fingertip control of all major vehicle and implement operations.

Left Control Lever



- A. Horn
- B. KSR
(Kubota Shockless Ride)
- C. AUX1
- D. AUX4 or Turn Signal
- E. Travel Speed

Right Control lever



- F. AUX3
- G. AUX2
- H. Proportional AUX Switch
- I. AUX Hold Switch




Specifications

Model		SSV65	SSV75		
Type of operator station		Open CAB / Closed CAB	Closed CAB		
Engine	Model	V2607-CR-TE4	V3307-CR-TE4		
	Emission certification	Tier 4	Tier 4		
	Output (SAE J1995 gross)	HP (kW)/rpm	64 (47.7)/2700	74.3 (55.4)/2600	
	Output (SAE J1349 net)	HP (kW)/rpm	63 (47.0)/2700	73.2 (54.6)/2600	
	Displacement	cc	2615	3331	
	Cylinders		4	4	
	Bore Stroke	in.(mm)	3.5 (87) × 4.4 (110)	3.8 (94) × 4.8 (120)	
Aspiration		Turbocharged	Turbocharged		
Loader Performance	Rated operating capacity-50% tipping load	kg	885	1220	
	Tipping load	kg	1770	2440	
	Breakout force	Bucket	kgf	2195	2669
		Lift arm	kgf	1750	2200
	Lift arm path		Vertical	Vertical	
Undercarriage	Standard tire size		10-16.5-8PR	12-16.5-10PR	
	Chain size ASA#		80	100	
	Travel speed	Low	km/h	11.1	11.9
		High	km/h	17.8	19.0
	Traction force	kgf	3329	3853	
	Ground clearance	mm	193	207	
Hydraulic system	Loader hydraulic flow	ℓ/min.	68.0	79.0	
	Loader hydraulic pressure	kgf/cm ²	230	230	
	Aux. hydraulic flow	Standard	ℓ/min.	68.0	79.0
		High	ℓ/min.	106.0	115.0
Service refill capacities	Hydraulic tank	ℓ	16.0	16.0	
	Fuel tank	ℓ	96.0	102.0	
Operating weight (Include operator weight 80 kg)		kg	3080 / 3200	3820	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective structure (ROPS) and seat belt in almost all applications.

Dimensions SSV65 / SSV75

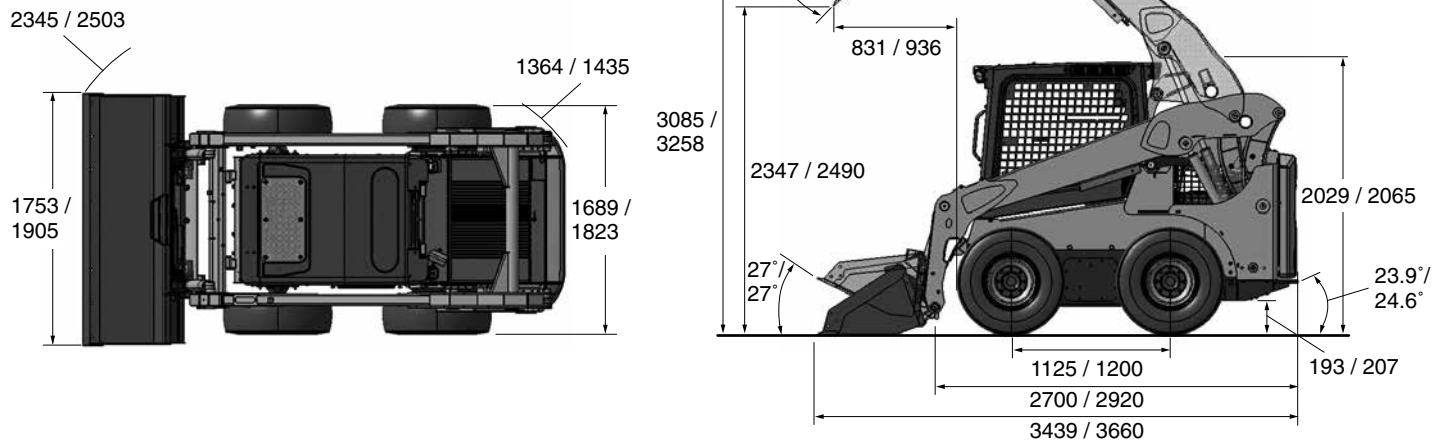

©2016 Kubota Corporation

Kubota®

KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029

Freecall: 1300-582-582

Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

